



ООО "ПромХимТех" - официальный поставщик насосного оборудования CNP в России и СНГ
www.promhimtech.ru / zakaz@promhimtech.ru

QY(B) 50Hz

Stainless steel self-suction gas-liquid mixing pump

QYL(B)



Nanfang Pump Industry Co.,Ltd.

CNP Headquarter
Address: Renhe Town, Hangzhou, China
Post code: 311107
Tel: +86 571 86051667, 86390516, 86390517
Fax: +86 571 86051696
E-mail: info@nanfang-pump.com
<http://www.cnppump.com>

E150305
subject to amendments



Company Profile



Founded in 1991, Nanfang Pump Industry Co., Ltd. (hereinafter referred to as CNP) has been listed on the Shenzhen Stock Exchange on 9th December 2010; Stock name: CNP; Stock code: 300145.

As the first enterprise specializing in the research and large-scale production of stainless steel stamping welded centrifugal pump in China, CNP is currently the professional manufacturer with the highest volume of production and marketing in that industry. It ranks first in the country in terms of product scope, sales volume, and production quality. The company has set up a complete network of marketing services to meet the requirements of overseas markets as well as domestic needs. The products have seen a wide range of application in the area of pressurization, industry, living water, cycling of air-conditioning water, heat supply, fire extinguishing system, pumping of underground water, treatment of sewage and waste water, chemical industry and desalination of sea water etc.

CNP has now entered into the fast track of development and has taken a major step forward in forging China Strong Pump Enterprise and World's famous brand in the Pump Industry. In order to better meet the client's needs and requirements for expansion, it has set up a wide network of selling and service, as well as offices and service centers in major cities in China, which are aimed at providing timely and effective services for our clients. Meanwhile, our company has successfully penetrated into the world market by forging a good business relationship with more than 50 countries and regions in the Europe, Northern American, and Southeast Asia etc.


Content

General Data

Definition of model	3
Working conditions	3
Application	3
Features	3
Performance curve	4
Performance table	4
QY(B) Installation dimensions	5
QYL(B) Installation dimensions	6

General Data

Definition of model

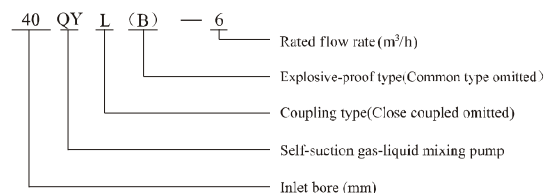

Working conditions

- QY and QYL designed for clear and low viscosity liquid, or liquid containing extra-fine foreign matters.
- QYB and QYLB designed for clear and low viscosity liquid, or explosive flammable liquid which containing very little solids.
- Liquid Temperature: -15°C ~ 120°C
- Maximum ambient temperature: +40°C
- Gas-liquid ratio 1:9 (gas suction volume 8 ~ 10%)
- Inlet: horizontal, Outlet: Vertical

Application


- Air suspension treating equipment, ozone water preparing equipment, and biological treating equipment.
- Feeding of heating or cooling medium for various temperature adjusting devices.
- Various filters: sucking or high pressure transferring low viscosity liquid from underground tank, such as gasoline and various solvent.
- Mist treatment of clear water, pure water, foods, chemical solution and waste solution.
- Strict applications (continuous running, abrupt variation in hydraulic pressure): such as small scale steam boiler, high building water supply, high pressure water injection to high pressure tank, and suction from vacuum tank.
- Sampling from river or tank, transfer foamable liquid, transfer liquid through long and horizontal pipeline, where air pockets likely occur.

Features

- It can suck water while sucking gas and pressurize and mix them inside it. Ultra fine air bubble 20 ~ 30 μ. It renders a good gas liquid solving effect.
- It has stable performances, high efficiency and low noise level, and its gas liquid solving efficiency is as high as twice that of the traditional mode.
- When it is used in air suspension unit, air compressors, various mixers, high pressure air solving tanks and relasers may be saved and thus the weakness of instable air supply and boiling of large air bubble which likely occur in traditional working model will be eliminated.
- When it is used in ozone water preparing equipment, many mixers and large oxidation towers may be saved and thus the cost for equipment will be greatly reduced. In addition, its gas liquid solving ratio may exceed 95%.
- It is simple in structure and operation, easy in maintenance and durable and needs less components. It has a good self suction capacity and a wide application range.

General Data

Performance curve

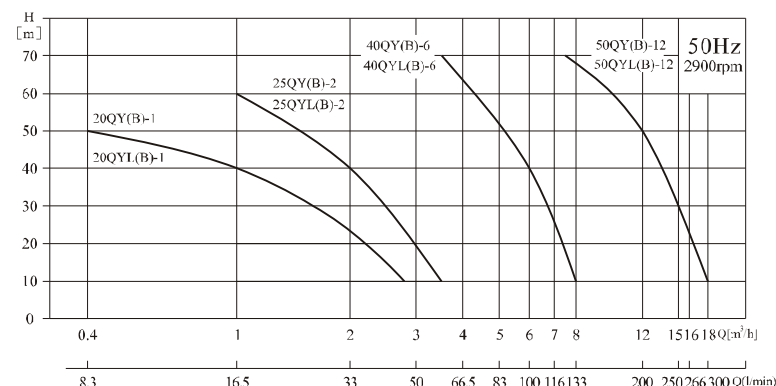


Performance table

Model	Driving motor			II (m)	10	20	30	40	50	60	70
	(kW)	(hp)	PH								
20QY-1	0.55	0.75	1PII 3PII	Q (m³/h)	2.8	2.2	1.6	1	0.4		
20QYB-1			3PH								
25QY-2	1.1	1.5	1PH 3PH		3.5	3	2.5	2	1.5	1	
25QYB-2			3PII								
40QY-6	3	4	3PII		8	7.4	6.7	6	5.2	4.3	3.5
40QYB-6	4	5.5									
50QY-12	5.5	7.5	3PH		18	16.4	15	13.6	12	10	7.5
50QYB-12	7.5	10									
20QYL-1	0.55	0.75	1PH 3PH	Q (m³/h)	2.8	2.2	1.6	1	0.4		
20QYLB-1			3PH								
25QYL-2	1.1	1.5	1PH 3PH		3.5	3	2.5	2	1.5	1	
25QYLB-2			3PH								
40QYL-6	4	5.5	3PH		8	7.4	6.7	6	5.2	4.3	3.5
40QYLB-6											
50QYL-12	7.5	10	3PII		18	16.4	15	13.6	12	10	7.5
50QYLB-12											

General Data

● QY(B) Installation sketch

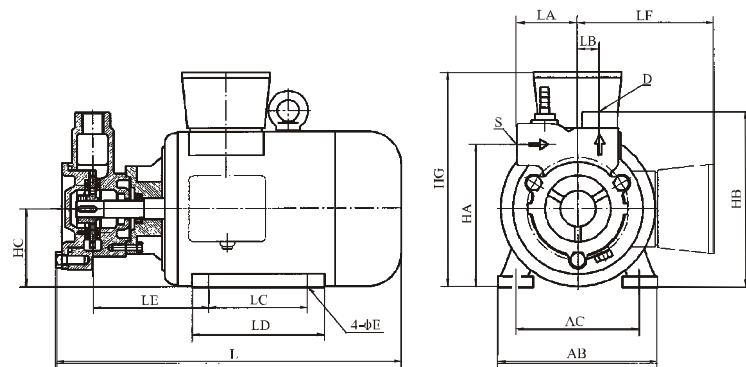


● QY(B) Installation dimensions

Model	HA	HB	HC	HG	AB	AC	L	LA	LB	LC	LD	LE	LF	S	D	E	Weight (kg)
20QY-1	128	158	71	195	150	110	320	55	20	90	120	100		$G\frac{3}{4}$	$G\frac{1}{2}$	7	10
20QYB-1	128	158	71	260	150	110	320	55	20	90	120	100		$G\frac{3}{4}$	$G\frac{1}{2}$	7	20
25QY-2	150	185	80	214	165	125	327	60	28	100	130	105	145	G1	$G\frac{3}{4}$	10	14
25QYB-2	150	185	80	340	165	125	327	60	28	100	130	105		G1	$G\frac{3}{4}$	10	27
40QY-6	185	230	100	270	200	160	444	70	40	140	180	135	180	$G1\frac{1}{2}$	$G1\frac{1}{4}$	12	36
40QYB-6	197	242	112	400	225	190	451	70	40	140	180	142		$G1\frac{1}{2}$	$G1\frac{1}{4}$	12	58
50QY-12	232	290	132	345	280	216	570	77	47	140	200	190	210	G2	$G1\frac{1}{2}$	12	63
50QYB-12	232	290	132	470	280	216	570	77	47	140	200	190		G2	$G1\frac{1}{2}$	12	91

General Data

● QYL(B) Installation sketch

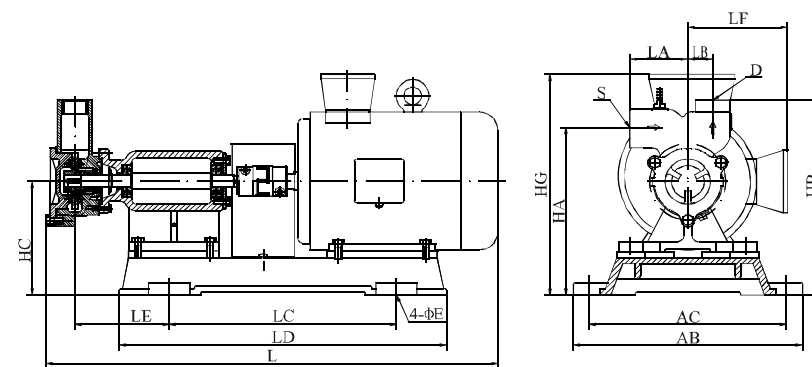

● QYL(B) Installation dimensions

Model	HA	HB	HC	HG	AB	AC	L	LA	LB	LC	LD	LE	LF	S	D	E	Weight (kg)
20QYL-1	198	228	141	265	265	225	532	55	20	228	388	135		$G\frac{3}{4}$	$G\frac{1}{2}$	φ8.5	26
20QYLB-1	198	228	141	330	265	225	532	55	20	228	388	135		$G\frac{3}{4}$	$G\frac{1}{2}$	φ8.5	36
25QYL-2	220	255	150	284	275	235	610	60	28	293	453	136	145	G1	$G\frac{3}{4}$	φ11	36
25QYLB-2	220	255	150	410	275	235	610	60	28	293	453	136		G1	$G\frac{3}{4}$	φ11	48
40QYL-6	255	300	170	340	345	305	721	70	40	363	535	152	180	$G1\frac{1}{2}$	$G1\frac{1}{4}$	φ11	65
40QYLB-6	265	312	182	470	345	305	721	70	40	363	535	152		$G1\frac{1}{2}$	$G1\frac{1}{4}$	φ11	88
50QYL-12	302	360	203	415	390	350	816	77	47	450	610	158	210	G2	$G1\frac{1}{2}$	φ11	99
50QYLB-12	302	360	203	540	390	350	816	77	47	450	610	158		G2	$G1\frac{1}{2}$	φ11	128

This image shows a full page of primary-ruled paper. It features multiple sets of horizontal lines designed to guide handwriting. Each set consists of three lines: two dashed outer lines and one solid middle line. These sets are repeated vertically down the entire page, providing a template for practicing letter formation and alignment. The paper is otherwise blank, with no margins or additional markings.

[illegible]

MEMO

China Head Quarter

Tel: +86-571-86051667
Email: info@nanfang-pump.com

Asia

Tel: +86-571-86390516
Email: kathy@nanfang-pump.com
Tel2: +86-571-86390517
Email: jason@nanfang-pump.com
FAX: +86-571-86051696
Add:
Office: #156~#168, Ilczhou street, Gongshu District, Hangzhou City ZheJiang Province, China
Factory: Nanfang pump industry Co., Ltd, Renhe Town Yuhang District, Hangzhou City, Zhejiang Province, China

Europe

Tel: +34-972-394654
Add: P1 Casa Nova C. Tarragona, 74, 17181 Aiguaviva -, Girona, Catalonia - Spain
Email: info@hydroo.com

Middle East

Tel: +971-42-552221
Add: Office 614, Business Village B, Deira, Dubai, UAE
Email: tong@nanfang-pump.com

Russia

Tel: +7 495 995 37 21
Add: 143441 Красногорский район п/о Путилково, 72 км МКАД, «Гринвуд бизнес-парк» корпус №9, пятый этаж, Москва, Россия.
Email: morpheus@nanfang-pump.com

America

Tel: +86-21-62608613
Email: brenda_wen@nanfang-pump.com

Web: www.cnppump.com

www.cnp-changsha.com

Email: info@nanfang-pump.com

ООО "ПромХимТех" - официальный поставщик насосного оборудования
CNP в России и СНГ

www.promhimtech.ru / zakaz@promhimtech.ru